USER MANUAL

MODEL 1058
VLINK Modem

PATTON Electronics Co.

Part# 07M1058-B
Doc# 058091UB
Revised 6/10/02

SALES OFFICE
(301) 975-1000
TECHNICAL SUPPORT
(301) 975-1007

ISO 9001 CERTIFIED

An ISO-9001Certified Company

1.0 Warranty Information 3
1.1 Radio and TV Interference 3
1.2 CE Notice 3
1.3 FCC Part 68 (1058DV Only) 4
1.4 Industry Canada Notice 5
1.5 Service 5

2.0 General Information 6
2.1 Features 6
2.2 Description 6

3.0 Installation 8
3.1 Standalone unit installation 8
3.2 Rack card installation 8
3.3 Connecting the Twisted-Pair Line Interface 10
3.4 Connecting the 10/100Base-T Ethernet Interface 11
Connecting the 10/100Base-T Ethernet Port to a Hub 11
Connecting the 10/100Base-T Ethernet Port to a PC (DTE) 12
3.5 Connecting the POTS/ISDN line 12
3.6 Connecting Power 13

4.0 Operation 14
4.1 Power Up 14
4.2 Front Panel LED Status Monitors 14

A Specifications 16
A.1 LAN Connection 16
A.2 Transmission Line 16
A.3 VDSL Line Rate 16
A.4 Actual Data Rate 16
A.5 VDSL Distance 16
A.6 VDSL Surge Suppressor 16
A.7 LED Status Indicators 16
A.8 Power Supply 16
A.9 Temperature Range 16
A.10 Humidity 16
A.11 Dimensions 16

B Model 1058 Series Factory Replacement Parts and Accessories 17

C Model 1058 Series Interface Pin Assignment 19
C.1 10/100Base-T Interface 19
RJ-45 19
C.2 VDSL Interface 19
RJ-45 19
Terminal Block 19
C.3 POTS/ISDN Interface 19
RJ-45 19

1.0 WARRANTY INFORMATION

Patton Electronics warrants all Model 1058 components to be free from defects, and will—at our option—repair or replace the product should it fail within one year from the first date of the shipment.

This warranty is limited to defects in workmanship or materials, and does not cover customer damage, abuse or unauthorized modification. If this product fails or does not performs as warranted, your sole recourse shall be repair or replacement as described above. Under no condition shall **Patton Electronics** be liable for any damages incurred by the use of this product. These damages include, but are not limited to, the following: lost profits, lost savings and incidental or consequential damages arising from the use of or inability to use this product. **Patton Electronics** specifically disclaims all other warranties, expressed or implied, and the installation or use of this product shall be deemed an acceptance of these terms by the user.

Note Conformity documents of all Patton products can be viewed online at www.patton.com under the appropriate product page.

1.1 RADIO AND TV INTERFERENCE

The Model 1058 generates and uses radio frequency energy, and if not installed and used properly-that is, in strict accordance with the manufacturer's instructions-may cause interference to radio and television reception. The Model 1058 has been tested and found to comply with the limits for a Class A computing device in accordance with specifications in Subpart B of Part 15 of FCC rules, which are designed to provide reasonable protection from such interference in a commercial installation. However, there is no guarantee that interference will not occur in a particular installation. If the Model 1058 does cause interference to radio or television reception, which can be determined by disconnecting the unit, the user is encouraged to try to correct the interference by one or more of the following measures: moving the computing equipment away from the receiver, re-orienting the receiving antenna and/or plugging the receiving equipment into a different AC outlet (such that the computing equipment and receiver are on different branches).

1.2 CE NOTICE

The CE symbol on your Patton Electronics equipment indicates that it is in compliance with the Electromagnetic Compatibility (EMC) directive and the Low Voltage Directive (LVD) of the European Union (EU). A Certificate of Compliance is available by contacting Technical Support.

1.3 FCC PART 68 (1058DV ONLY)

Caution

The Model 1058D is not intended to be connected to the public telephone network.

Caution

The VLINK port is not intended to be connected to the public telephone network. The 1058DV contains a POTS/ISDN connection that can be connected to the public telephone network.

This equipment complies with Part 68 of the FCC Rules. Please note the following:

1. You are required to request service from the telephone company before you connect the Model 1058DV to a network. When you request service, you must provide the telephone company with the following data.

   — The required Universal Service Order code (USOC) jack: RJ-11C

   — The make, model number, Ringer Equivalence Number (REN), and FCC Registration number of the Model 1058DV.

   The REN helps you determine the number of devices you can connect to your telephone line and still have all of those devices ring when your number is called. In most, but not all, areas, the sum of the RENs of all devices should not exceed five (5.0). To be certain of the number of devices you can connect to your line, you should call your local telephone company to determine the maximum REN.

   — The Facility Interface Code: **02LS2**

   — The Service Order Code(s) (SOC): **9.0F**

   — REN No.: **0.2**

2. Your telephone company may make changes to its facilities, equipment, operations, or procedures that could affect the proper functioning of your equipment. The telephone company will notify in advance of such changes to give you an opportunity to maintain uninterrupted telephone service.

3. If your Model 1058DV causes harm to the telephone network, the telephone company may temporarily discontinue your service. If possible, they will notify you in advance, but if advance notice is not practical, you will be notified as soon as possible and will be informed of your right to file a complaint with the FCC.

4. If you experience trouble with the Model 1058DV, please contact Patton Electronics Company for service or repairs. Repairs should be performed only by Patton Electronics Co.

5. You are required to notify the telephone company when you disconnect the Model 1058DV from the network.

1.4 INDUSTRY CANADA NOTICE

NOTICE: This equipment meets the applicable Industry Canada Terminal Equipment Technical Specifications. This is confirmed by the registration number. The abbreviation, IC, before the registration number signifies that registration was performed based on a Declaration of conformity indicating that Industry Canada technical specifications were met. It does not imply that Industry Canada approved the equipment.

1.5 SERVICE

All warranty and non-warranty repairs must be returned freight prepaid and insured to Patton Electronics. All returns must have a Return Materials Authorization number on the outside of the shipping container. This number may be obtained from Patton Electronics Technical Services at:

- Tel: **+1 (301) 975-1007**
- Email: **support@patton.com**
- URL: **http://www.patton.com**

Note Packages received without an RMA number will not be accepted.

2.0 GENERAL INFORMATION

Thank you for your purchase of this Patton Electronics product. This product has been thoroughly inspected and tested and is warranted for one year for parts and labor. If any questions or problems arise during installation or use of this product, contact Patton Electronics Technical Support at +1 (301) 975-1007.

2.1 FEATURES

- Easy to install standalone VLINK modems—*no configuration required*
- Auto-sensing full or half-duplex Ethernet
- Auto-sensing 10/100Base-T
- Extends network connections up to 4,652 ft (1,418 m) over 2-wire 24-AWG unconditioned lines
- 12.5 Mbps symmetric line rate; 10 Mbps data rate
- POTS/ISDN splitter on board
- Transparent operation
- LED indicators for Power, Ethernet Link & Activity, VLINK & Quality of Line (QOL)
- Surge suppression up to 20 kA (8/20 µs)
- Available in rack-mount or standalone configurations
- Made in the USA

2.2 DESCRIPTION

The Patton Electronics Model 1058/CO* and 1058/CP VDSL* modems provide high-speed LAN connections between peered Ethernet LANs, remote PC's, or any other network enabled 10/100Base-T device.

Operating in pairs, a Model 1058/CO (central office) located at one end of the LAN extension and a Model 1058/CP (customer premise) at the other end, these units can automatically forward LAN broadcasts, multicasts, and frames across a 2-wire voice-grade twisted-pair link. The data is passed transparently (that is, unmodified) through the 1058s. The 1058s

---

* Only Models 1058DV/CO and 1058DV/CP have POTS/ISDN splitters on board.

automatically add and delete MAC addresses, only passing packets across the VDSL link that are meant for the remote peered LAN.

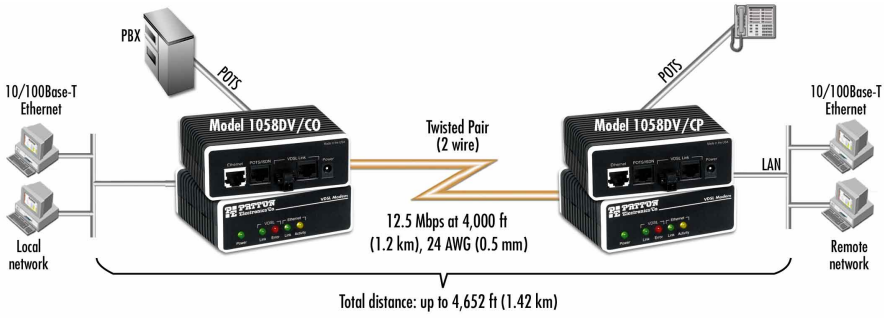

Figure 1. Typical application

The 1058DV/CO and 1058DV/CP work together to create a transparent extension between two peered Ethernet LANs. POTS/ISDN calls can be made over a VDSL link without interfering with the data. Figure 1 shows a typical point-to-point application.

3.0 INSTALLATION

Because the Model 1058 requires no configuration, it can be installed quickly. If you are installing a standalone unit, refer to section 3.1 “Standalone unit installation”. Otherwise, refer to section 3.2 “Rack card installation”.

3.1 STANDALONE UNIT INSTALLATION

Do the following:

1. Connect the line interface between the units (refer to section 3.3, “Connecting the Twisted-Pair Line Interface” on page 10)

   Note See Figure 2 for the standalone unit’s rear panel arrangements.

2. Connect the Ethernet interface (refer to section 3.4, “Connecting the 10/100Base-T Ethernet Interface” on page 11).

3. Connect the power plug (refer to section 3.6, “Connecting Power” on page 13).

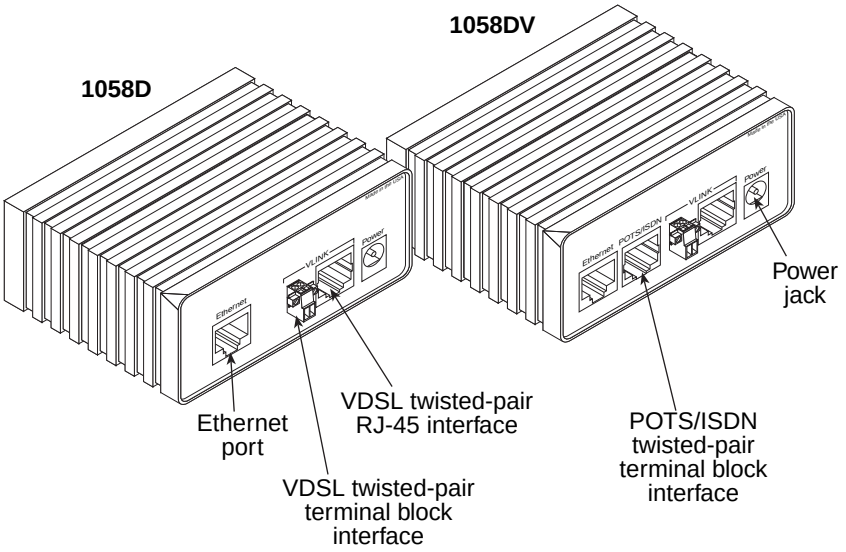

Figure 2. Model 1058 standalone rear panel

3.2 RACK CARD INSTALLATION

The Model 1058 rack card version comprises a front card and a rear card.Do the following to install the cards into the rack chassis:

1. Slide the rear card into the back of the chassis along the metal rails.

2. Secure the rear card using the supplied metal screws.

3. Slide the front card into the chassis until you feel resistance as the front card engages the rear card. When that happens, *gently* push the front card forward until it is fully seated in the card-edge receptacle of the rear card (it should *click* into place).

4. Secure the front card using the captive fasteners.

   Note The Model 1001R14 chassis supports "hot swapping" of cards, so it is not necessary to power down the rack when you install or remove a Model 1058 rack card.

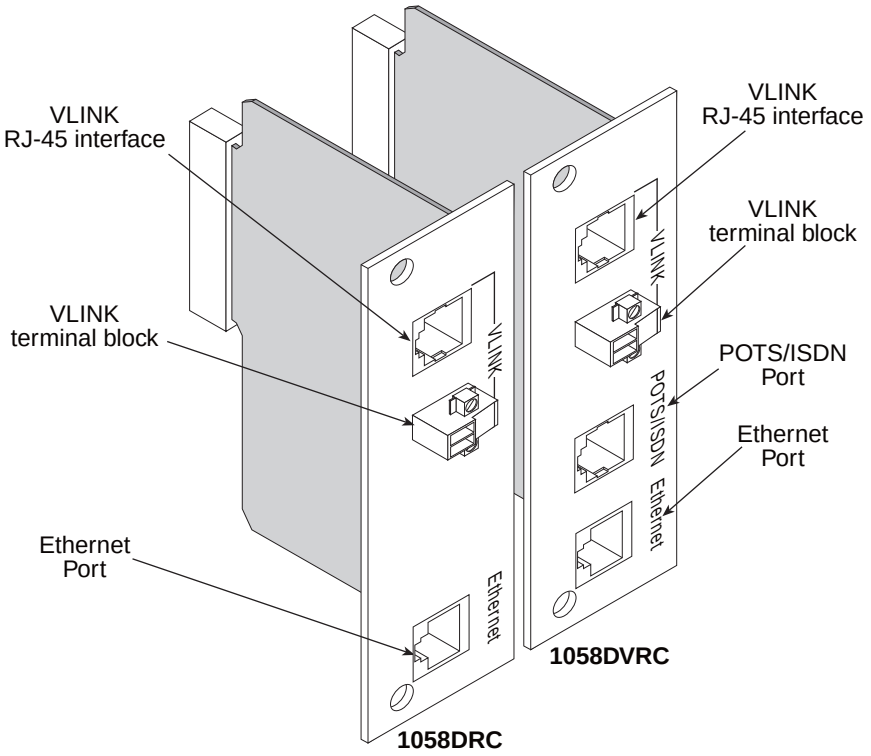

Figure 3. Model 1058 rack cards

5. Connect the line interface between the units (refer to section 3.3, "Connecting the Twisted-Pair Line Interface" on page 10)

   Note See Figure 3 for the rack card's panel arrangements.

6. Connect the Ethernet interface (refer to section 3.4, "Connecting the 10/100Base-T Ethernet Interface" on page 11).

3.3 CONNECTING THE TWISTED-PAIR LINE INTERFACE

The Model 1058 supports communication between two peer Ethernet LAN sites over a distance of up to 4,652 ft (1,418 m) over 24 AWG (0.5 mm) twisted-pair wire.

> **Note** Actual distance and link performance may vary depending on the environment and type/gauge of wire used.

Follow the steps below to connect the Model 1058 VDSL Interfaces.

> **Note** The Model 1058 units work in pairs. One of the units must be a Model 1058/CO (Central Office), and the other unit must be a Model 1058/CP (Customer Premise). It does not matter which end is the 1058/CO and which is the 1058/CP. The link is always initiated by the 1058/CP. As long as the 1058/CO is powered on, the 1058/CP can establish a link by being powered on or by having its power reset.

1. To function properly, the two Model 1058's must be connected together using twisted-pair, unconditioned, dry, metal wire, between 19 (0.9mm) and 26 AWG (0.4mm). Leased circuits that run through signal equalization equipment are not acceptable.

2. The Model 1058 is equipped with two interface jacks that can be used on the VDSL interface, an RJ-45 or a terminal block. These VDSL interfaces are a two-wire interface. Observe the signal/pin relationships on the Model 1058's VDSL interface jacks.

The RJ-45 connector on the Model 1058's twisted pair interface is polarity insensitive and is wired for a two-wire interface. The signal/pin relationship is shown in Figure 4.

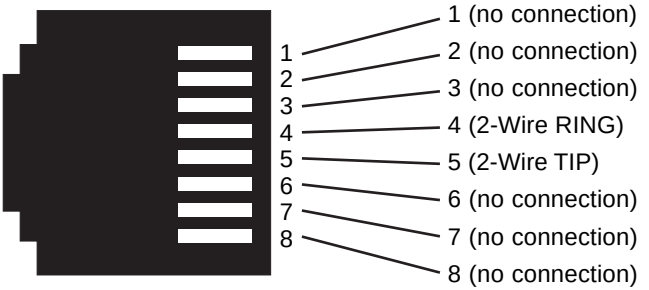

Figure 4. Model 1058 (RJ-45) twisted pair line interface.

The terminal block connector on the Model 1058's twisted pair interface is polarity insensitive and is wired for a two-wire interface. The signal/pin relationships is shown in Figure 5.

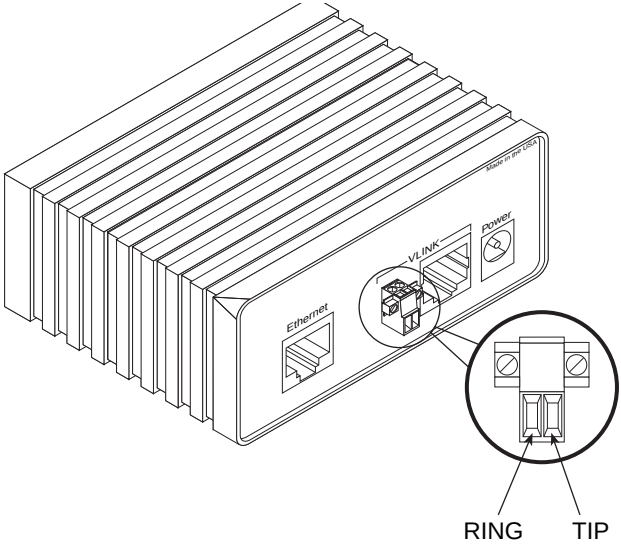

Figure 5. Model 1058D (Terminal Block) twisted pair line interface.

3.4 CONNECTING THE 10/100BASE-T ETHERNET INTERFACE

The shielded RJ-45 port labeled *Ethernet* is the 10/100Base-T interface. This port is designed to connect directly to a 10/100Base-T network. Figure 6 shows the signal/pin relationships on this interface. You may connect this port to another Ethernet device via a Type 4 or Type 5 cable that is up to 328 ft long.

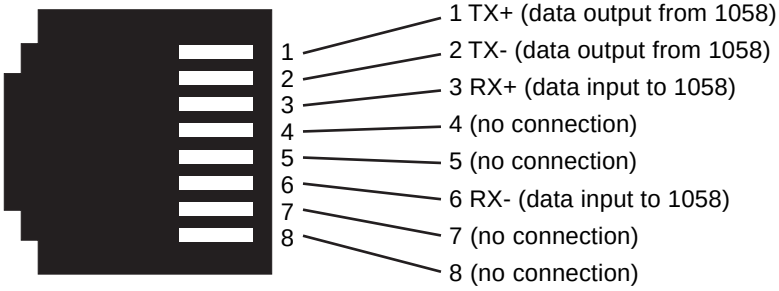

Figure 6. Model 1058 10/100Base-T RJ-45 Connector Pinout.

Connecting the 10/100Base-T Ethernet Port to a Hub

The Model 1058 10/100Base-T interface is configured as DTE (Data Terminal Equipment), just like a 10/100Base-T network interface card in a PC. Therefore, it “expects” to connect to a 10/100Base-T Hub using a

straight-through RJ-45 cable. Figure 7 diagrams the cable wiring for connecting the Model 1058 to a 10/100Base-T hub.

1058 10/100Base-T Port RJ-45 Pin No.		10/100Base-T Hub RJ-45 Pin No.
1 (TX+)	----------	1 (RX+)
2 (TX-)	----------	2 (RX-)
3 (RX+)	----------	3 (TX+)
6 (RX-)	----------	6 (TX-)

Figure 7. Wiring diagram for connecting the Model 1058 to a 10/100Base-T hub

Connecting the 10/100Base-T Ethernet Port to a PC (DTE)

The Model 1058 10/100Base-T interface is configured as DTE (Data Terminal Equipment). If you wish to connect the 1058 to another DTE devices such as 10/100Base-T network interface card in a PC (or 1058s in a back-to-back arrangement), you must construct a 10/100Base-T crossover cable as shown in Figure 8.

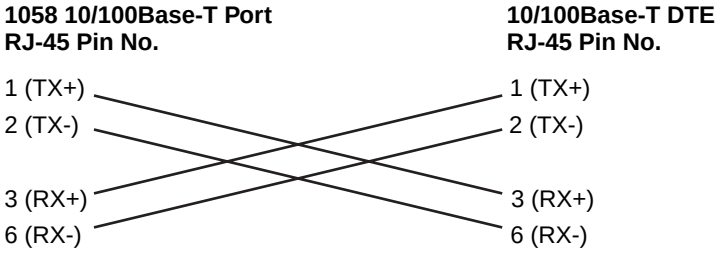

Figure 8. 10/100Base-T crossover cable

3.5 CONNECTING THE POTS/ISDN LINE

The RJ-45 port labeled “POTS/ISDN” is the POTS/ISDN interface. A telephone or an ISDN device may be connected to this port and carried over the VDSL line. The units do not need power for the POTS interface to

work. The RJ-45 connector in the model 1058's POTS/ISDN interface is wired as shown in Figure 9.

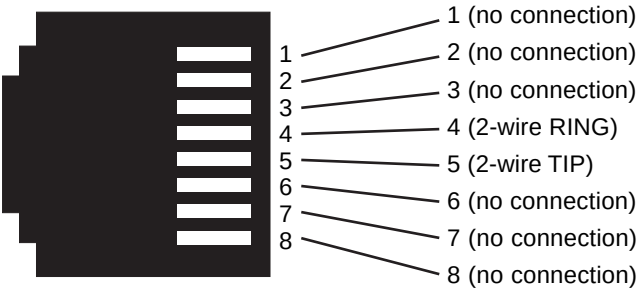

Figure 9. Model 1058DV (RJ-45) POTS/ISDN interface

3.6 CONNECTING POWER

An external AC or DC power supply is available separately. This connection is made via the barrel jack on the rear panel of the Model 1058. No configuration is necessary for the power supply (See Appendix B for domestic and international power supply and cord options).

DC power (supplied via the power supply jack to the 1058) must meet the following requirements; DC power supplied must be regulated +5VDC ±5%, 1.0A minimum. Center pin is +5V. The barrel type plug has a 2.5/5.5/10mm I.D./O.D./Shaft Length dimensions.

The Model 1058 does not have a power switch, so it powers up as soon as it is plugged in.

4.0 OPERATION

Once the Model 1058s are properly installed, they should operate transparently. No user settings required. This section describes reading the LED status monitors.

4.1 POWER UP

Before applying power to the Model 1058, please review section 3.6, “Connecting Power” on page 13 to verify that the unit is connected to the appropriate power source.

4.2 FRONT PANEL LED STATUS MONITORS

The Model 1058 features five front panel LEDs that monitor power, the Ethernet signals, and the VDSL connection. Figure 10 (standalone version) and Figure 11 on page 15 (rack card version) show the front panel location of each LED. Table 1 on page 15 describes the LED functions.

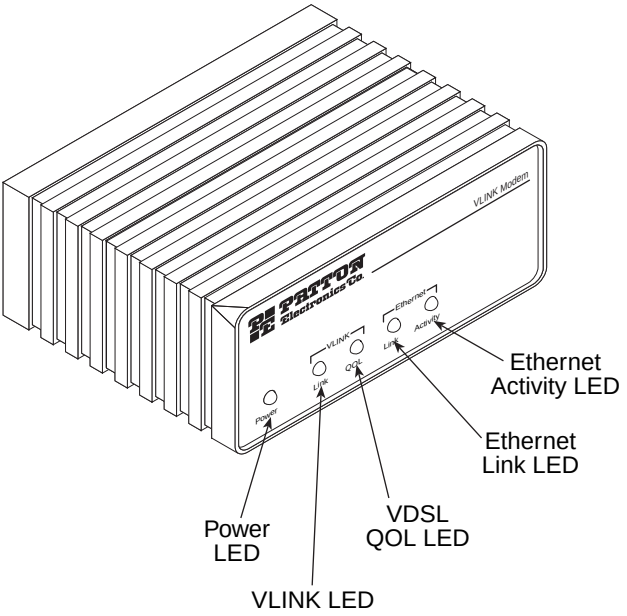

Figure 10. Model 1058 standalone unit front panel

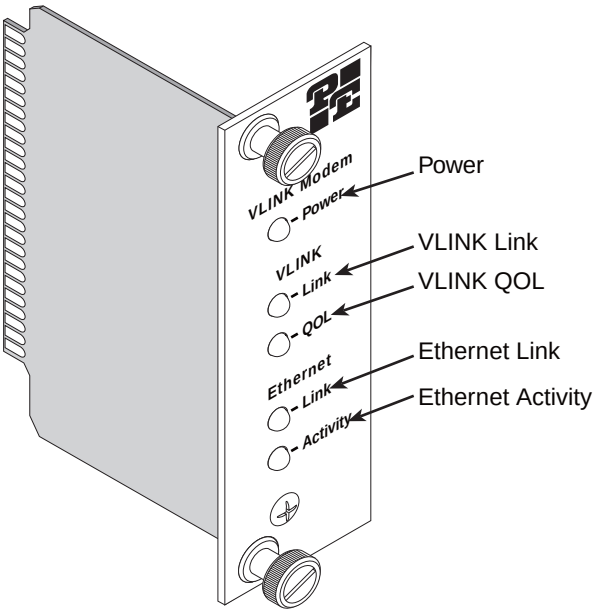

Figure 11. Model 1058 rack card front panel

Table 1: Front panel LED description

LED	Description
Power	Solid GREEN to indicate the unit is powered on.
VLINK Link	(Active Green) Solid green (ON) to indicate that the end-to-end VDSL link between the Model 1058s is established. The VLINK LED is OFF when the link is down.
VLINK QOL	(Active Yellow) Flashes YELLOW to indicate the processor is correcting an error in the data thus preventing the transmission of corrupted data to the Ethernet port. The more error corrections, the more often the LED blinks. If the light remains lit continuously, it means that the VDSL line is noisy—although the data at the Ethernet port remains uncorrupted. Further impairment of the line however, risks having the line fail, as indicated by the green VLINK Link LED extinguishing.
Ethernet Link	(Active Green) Solid Green indicates that 10/100Base-T Ethernet link has been established.
Ethernet Activity	(Active Yellow) Flashes yellow to indicate Ethernet activity on the Model 1058's 10/100Base-T Ethernet port.

APPENDIX A
SPECIFICATIONS

A.1 LAN CONNECTION

- Shielded RJ-45, 10/100Base-T, IEEE 802.3 Ethernet
- VDSL Connection: RJ-45 and Terminal Block

A.2 TRANSMISSION LINE

Two-wire unconditioned twisted pair.

A.3 VDSL LINE RATE

12.5 Mbps, symmetric upstream/downstream.

A.4 ACTUAL DATA RATE

10 Mbps, symmetric upstream/downstream.

A.5 VDSL DISTANCE

4,000 ft (1,219 m)

A.6 VDSL SURGE SUPPRESSOR

Gas tube with maximum current surge: 20 kA (8120 μs).

A.7 LED STATUS INDICATORS

- Power (Green)
- VDSL: Link (Green) & Error (Red)
- Ethernet: Link (Green) & Activity (Yellow)

A.8 POWER SUPPLY

External AC and DC options:

- AC: 120 VAC, 220 VAC, and UI (120–240 VAC)
- DC: 12 VDC, 24 VDC and 48 VDC
- Power consumption: 450 mA at 5 VDC

A.9 TEMPERATURE RANGE

0–50°C

A.10 HUMIDITY

Up to 90% non-condensing.

A.11 DIMENSIONS

1.58H x 4.16W x 3.75D in. (10.6H x 4.1W x 8.8D cm)

APPENDIX B

MODEL 1058 SERIES FACTORY
REPLACEMENT PARTS AND ACCESSORIES

Patton Model #	Description
Base Models	
1058DRC/CO	CO VDSL Rack Card; data only
1058DRC/CP	CP VDSL Rack Card; data only
1058DVRC/CO	CO VDSL Rack Card; voice and data
1058DVRC/CP	CP VDSL Rack Card; voice and data
1058D/CO	CO VDSL Modem, data only, no power supply
1058D/CP	CP VDSL Modem, data only, no power supply
1058D-2PK	VDSL MODEM Kit: includes one central office (CO) and one customer premise (CP) Model 1058, data only, no power supply
1058DV/CO	CO VDSL Modem, voice & data, no power supply
1058DV/CP	CP VDSL Modem, voice & data, no power supply
1058DV-2PK	VDSL MODEM Kit: includes one central office (CO) and one customer premise (CP) Model 1058, voice & data, no power supply
07M1058	User Manual
Power Supplies	
08055DCUI	100-240VAC (+5V reg. DC/2A) Universal Input Adapter.
08055-120-5-1	120 VAC (+5V reg. DC/1A) Input Adapter
12V-PSM	12 VDC Input Adapter
24V-PSM	24 VDC Input Adapter
48V-PSM	48 VDC Input Adapter
Power Cords*	
0805US	American Power Cord
0805EUR	European Power Cord CEE 7
0805UK	United Kingdom Power Cord
0805AUS	Australian Power Cord
0805DEN	Denmark Power Cord
0805FR	France/Belgium Power Cord
0805IN	India Power Cord
0805IS	Israel Power Cord
0805JAP	Japan Power Cord
0805SW	Switzerland Power Cord

*Only required with optional UI power supply (08055DCUI)

APPENDIX C

MODEL 1058 SERIES INTERFACE PIN ASSIGNMENT

C.1 10/100BASE-T INTERFACE

RJ-45

- Pin 1: TX+
- Pin 2: TX-
- Pin 3: RX+
- Pin 6: RX-
- Pins 4, 5, 7, 8: no connection

C.2 VDSL INTERFACE

RJ-45

- Pin 4: RING
- Pin 5: TIP
- Pins 1, 2, 3, 6, 7, 8: no connection

Terminal Block

See Figure 5 on page 11.

C.3 POTS/ISDN INTERFACE

RJ-45

- Pin 4: 2-wire RING
- Pin 5: 2-wire TIP
- Pins 1, 2, 3, 6, 7, 8: no connection

Copyright © 2001, 2002
Patton Electronics Company
All Rights Reserved.